


SDP13S-FIR8024



Dimensions

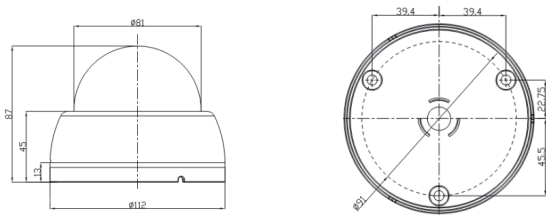

Product Summary

- 1/3" Progressive CMOS Sensor
- TDN 24 IR LED
- HD (1024 x 720 30P) Video Out
- 3D + 2DNR (Digital Noise Reduction)
- SENS UP, SMART IR, DEFOG
- HLMASK (High Light Masking)
- Privacy Masking, Motion Detection
- LSC (Lens Shading Correction)
- ACE (Adaptive Contrast Enhancer)
- 3.6mm Mega Pixel Lens (ICR)
- OSD (On Screen Display)
- CVBS Out (For Installer)

Major Specifications

* OSD Menu is subject to change without prior notice

MODEL NAME	SDP13S-FIR8024
Image Device	1/3" Progressive CMOS, 1.4Megapixel
Total Pixels	1312(H) x 1069(V) / Approx.1.40M Pixels
Effective Pixels	1305(H) x 1049(V) / Approx.1.40M Pixels
Scanning System	Progressive Scan
Synchronization	Internal Synchronization
Horizontal Resolution	More than 1,000 TV Lines
Video Output	HD SDI / CVBS (For Installer)
S/N Ration	More than 50dB (AGC Off)
Lens	3.6mm Mega Pixel Lens
LED	24 LED
Storage Temp.	14°F ~ 122°F (-10°C ~ + 50°C)
Operating Temp.	4°F ~ 140°F (-20°C ~ + 60°C)
Humidity	Less than 80%
Power Source	DC12V 300mA
Dimensions	112mm(Φ) X 87mm(H)
Net Weight	Approx. 150g