




### Dimensions

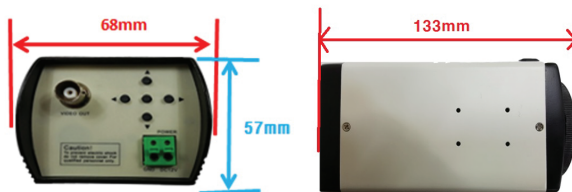

### Product Summary

- 1/3" SONY CMOS 2.43M
- 1000TVL A-HD Output
- D- WDR (Digital Wide Dynamic Range)
- 3D + 2DNR (Digital Noise Reduction)
- SENS UP, SMART IR, DEFOG
- HLMASK (High Light Masking)
- Privacy Masking, Motion Detection
- LSC (Lens Shading Correction), ACE
- ACE (Adaptive Contrast Enhancer)
- OSD (On Screen Display)

### Major Specifications

\* OSD Menu is subject to change without prior notice

MODEL NAME	SSP22AHD-N65	
	NTSC	PAL
Image Device	1/2.9" SONY CMOS, 2.43Megapixel	
Total Pixels	2,000(H) x 1,241(V) / 2,482,000 (Pixel)	
Effective Pixels	1,984(H) x 1,225(V) / 2,430,400 (Pixel)	
Scanning System	2:1 Interlace	Non- Interlace
Synchronization	Internal Synchronization	
Horizontal Resolution	More Than 1000 TV Lines	
Video Output	<b>AHD 2.0 Output</b>	
S/N Ratio	More Than 52dB (AGC OFF / F1.2)	
Shutter / AGC	Auto (High, Low Luminance) / Manual	
White Balance	ATW (Speed, Delay, ATW, Environment) / User1,2 / Manual	
Picture Adjustment	Mirror / Brightness / Contrast / Sharpness / Hue / Gain	
ATR	ON / OFF	
Motion / Privacy	ON / OFF	
Lens	X	
LED	X	
Storage Temp.	14°F ~ 122°F (-10°C ~ + 50°C)	
Operating Temp.	4°F ~ 140°F (-20°C ~ + 60°C)	
Humidity	Less than 80%	
Cable	X	
Power Source	DC12V 100mA	
Dimensions	68mm X 57mm X 133mm	
Net Weight	Approx. 400g	