


SV-HDM200



Dimensions

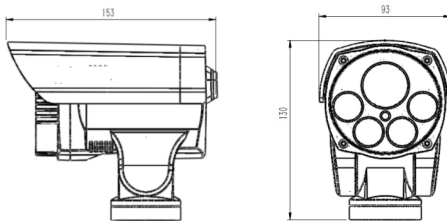

Product Summary

- 1/2.9" Sony Exmor CMOS sensor
- Full HD resolution 1920 x 1080P
- Ultra low illumination 0.01Lux
- 10x optical zoom, PTZ control
- Day/Night (ICR), AWB, AGC, BLC, 2D/3D-DNR
- WDR, Smart IR, Motion Detection, Privacy Mask, Mirror
- Lightning protection 4000V
- Strong water-proof housing, IP66
- 4 pcs Array IR Leds, IR distance 60-80 meters
- 5.1 – 51 mm AF lens

Major Specifications

* Specifications are subject to change without prior notice.

Model Name		SV-HDM200
Camera	Image Sensor	1/2.9" Sony Exmor CMOS
	Effective Pixels	1920(H)×1080 (V)
	Electronic Shutter	AUTO, 1/25s ~ 1/100000s
	Min. Illumination	0.01Lux@F1.6(AGC ON), 0Lux IR on
	Day/Night	Auto/Color/(B/W)
	WDR	Digital WDR
	White Balance	Auto
	AGC/BLC/HLC	Support
	DNR	2D/3D DNR, multi-levels adjustable
	OSD Menu	Support
Other	Motion, Privacy Mask, Mirror, Flip	
Encode	Embedded Solution	Ambarella S2L55M
	Video Standard	H.264/5
	Video Resolution	1080P@25/30fps
	Video Bitrates	32Kbps - 16Mbps, VBR/CBR
	Audio Standard	G.711-u
IR Led	IR Led	4 pcs 850nm Array IR Leds
	IR Distance	60-80 M
Lens	Focal length	5.1 -51 mm AF lens
	Zoom	10x optical zoom
PTZ	Pan/Tilt Range	Pan: 0° ~ 300°; Tilt: -5° ~ 60°
	Preset Point	256
	Manual Control Speed	Pan: 0.5° ~12° /s; Tilt: 0.51° ~12° /s
	Preset Tour	8 lines
	Pattern Scan	4 lines
	Power On Action	None/Preset/Pan scan/Cruise
Optional Function		POE, Audio, Alarm In/Out, SD card, etc.
Network Services	Web	IE , etc.
	Media	CMS, Android, IOS
	ONVIF	2.6 compatible
General	Network Port	1-RJ45, 100Mbps, POE optional
	Power Supply	12 VDC ± 10%
	Power Consumption	< 15 W
	Operating Temp.	-30℃-(+60)℃, 10%-90%RH